

Clarke®

Clarke®
American Sanders

OBS 18 & OBS 18dc
Orbital Floor Sanders




OBS 18 & OBS 18dc

Electric Orbital Floor Sander

Clarke®
American Sanders

Division of
ALTO

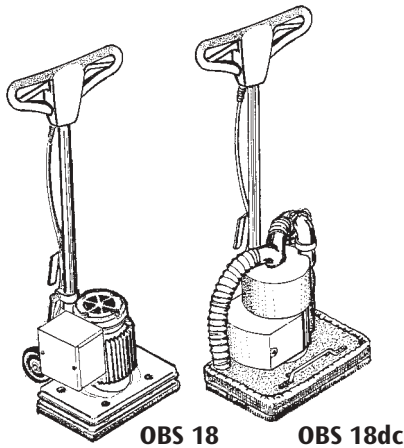

OBS 18

OBS 18dc

KEY FEATURES

- Powerful totally enclosed motor requires less maintenance
- Large non-marking transport wheels
- Cast aluminum pad plate included with machine
- Precision balanced for smooth operation
- Available in standard or dust control version
- Designed specifically for fine finishing of hardwood floors
- Excellent “between coats” system

SPECIFICATIONS

| | |
|---------------------------|---|
| Sanding path | 18 in (45.75 cm) |
| Sanding pad size | 12 x 18 in (30.5 x 45.75 cm) |
| Motor | 1 hp |
| Power cable (14-3 Gray) | 50 ft (15.2 m) |
| Speed of sanding pad (AC) | 3450 orbits per minute |
| Weight of sanding unit | 109 lbs (49.44 kg) |
| Size (L x W x H) | 18½ x 20 x 45 in (46.9 x 50.8 x 114.3 cm) |
| Total weight | 125 lbs (56.7 kg) |
| Shipping weight | 145 lbs (65.8 kg) |

PRODUCT

- Seamless chrome handle tube resists rust, and increases durability.
- Totally enclosed fan cooled dual capacitor motor eliminates overheating
- Heavy cast iron main frame supplies weight for aggressive performance
- Cast aluminum pad driver plate reduces chance of bending
- Unique skirting directs air to pick-up chamber (dc only)
- Large 9 inch vacuum fan eliminates annoying dust (dc only)
- Large 1½ inch diameter drive shaft resists damage

EASE OF USE

- No side torque
- Operates in any direction
- Floating skirt requires no adjustment (dc only)
- Harpoon face driver firmly grips pad

- Dual switch levers for easy operation with either hand
- Throw away paper bags eliminates filter bag cleaning (dc only)
- Convenient lifting handle
- Dustless sanding reduces cleanup time (dc only)
- 3450 orbits per minute sands and screens faster (ac only)

PRODUCTIVITY

- Designed specifically for the finishing and polishing of wood floors
- Large non-marking transport wheels protect finished areas from damage
- Full “harpoon” face pad driver reduces pad expansion for extended pad life
- Small ¼ inch orbit produces finer finish and reduces chance of swirl marks
- Cast pad driver keeps screens and paper flat on the floor

SAFETY

- Precision balanced counter weight and oversized drive bearing supply consistent performance, while reducing vibration
- Ergonomic, dihedral handle with safety interlock offers operator comfort and protection
- DC version controls dust for improved air quality
- Hospital grade plug assures electrical safety when connected to a properly grounded outlet

OPTIONAL EQUIPMENT AND ACCESSORIES

- Disposable paper bags
- Floor pads
- Sticky backed sanding sheets
- Sanding screens

Clarke®

2100 Hwy. 265
Springdale, AR 72764

DISTRIBUTED BY:

Customer Service: 1.800.253.0367
Fax Orders to: 1.800.825.2753
Technical Service: 1.800.356.7274

©2001 ALTO U.S. Inc., All Rights Reserved. Specifications subject to change without notice. P/N 79703A

