


®

**Clarke®**  
**American Sanders**

***Professional Dust Control***  
**Sanding System**



# 3-Stage Filter System

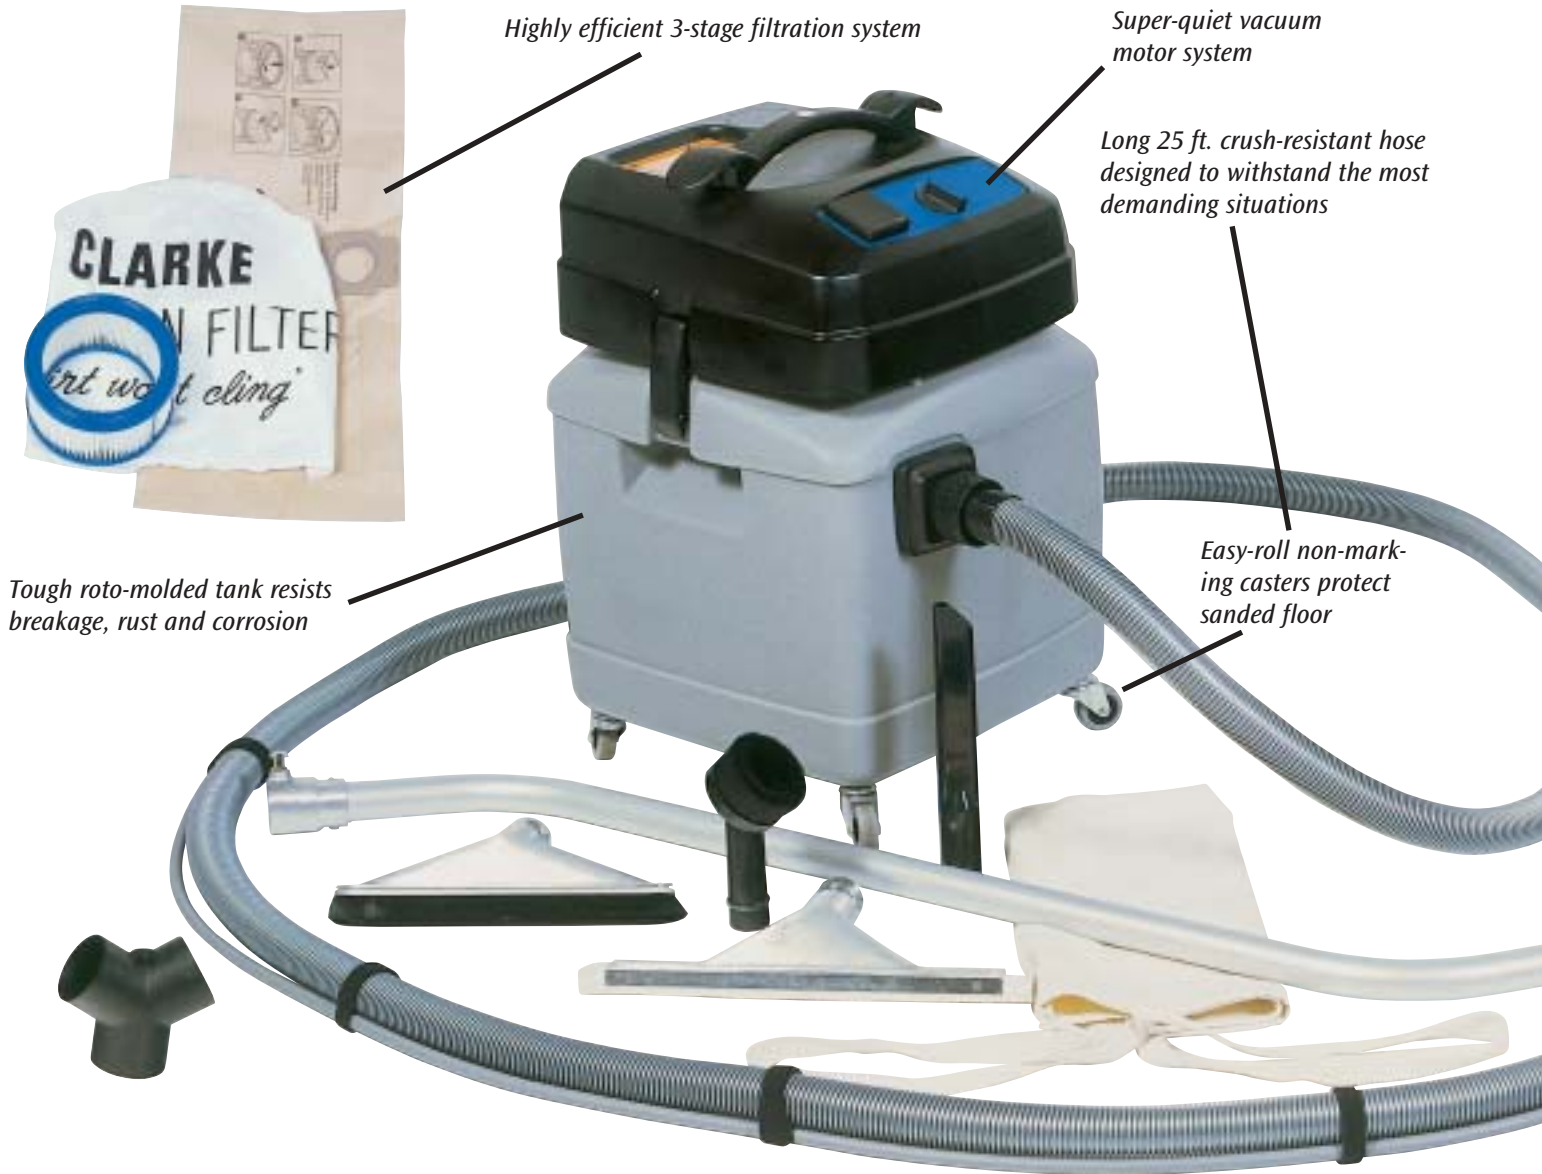

Highly efficient 3-stage filtration system

Super-quiet vacuum motor system

Long 25 ft. crush-resistant hose designed to withstand the most demanding situations


Tough roto-molded tank resists breakage, rust and corrosion

Easy-roll non-marking casters protect sanded floor



Combine the CAV-15 vacuum with the Sander 1600dc for ultimate experience in dustless sanding and screening.

A complete system designed to be easily adapted for maximum dust control in multiple sanding tasks.

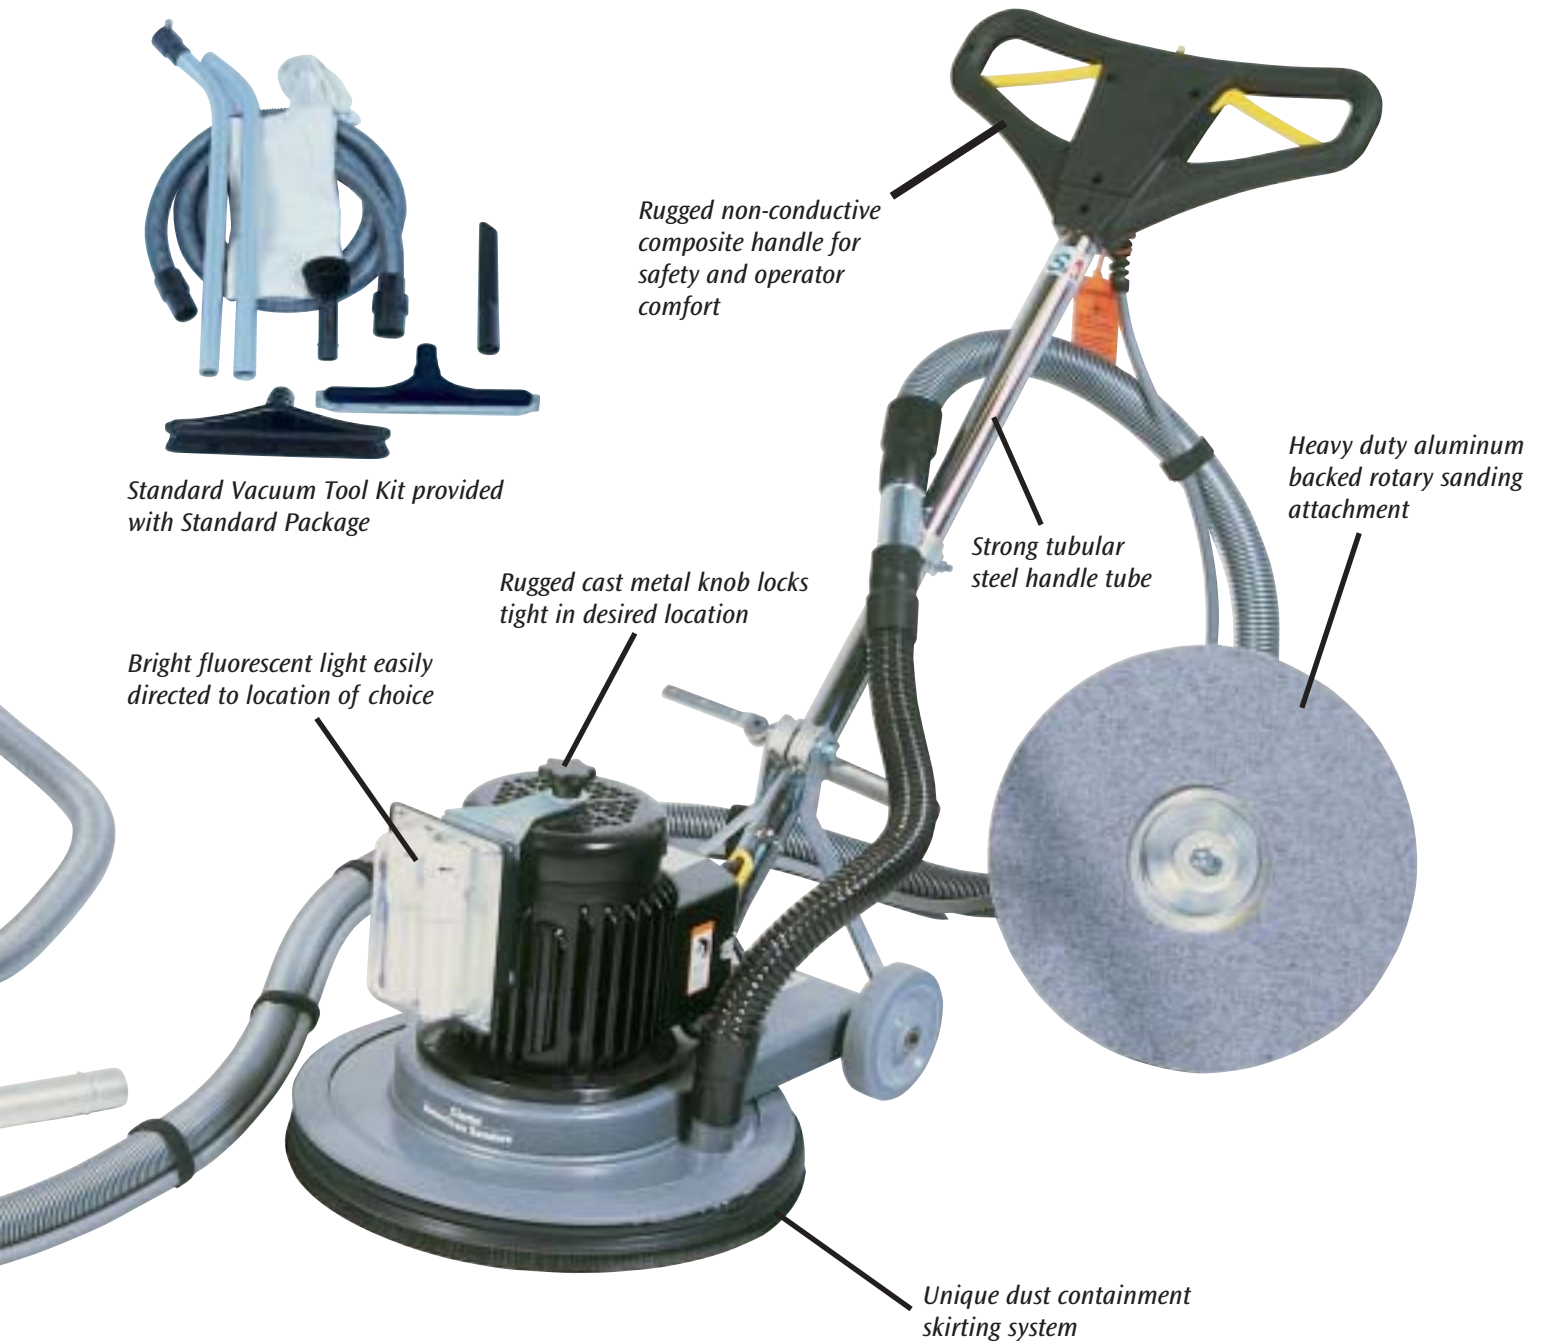

Standard Vacuum Tool Kit provided with Standard Package

Rugged non-conductive composite handle for safety and operator comfort

Heavy duty aluminum backed rotary sanding attachment

Strong tubular steel handle tube

Rugged cast metal knob locks tight in desired location

Bright fluorescent light easily directed to location of choice

Unique dust containment skirting system



Easily adapts to belt or drum sanders for reduced airborne dust. Large 15-gallon tank holds more dust.




A wide range of performance enhancing accessories and options are available to make the job easier from start to finish.

# Professional Dust Control

## Sanding System

**Clarke®**  
**American Sanders**

Division of  
**ALTO®**

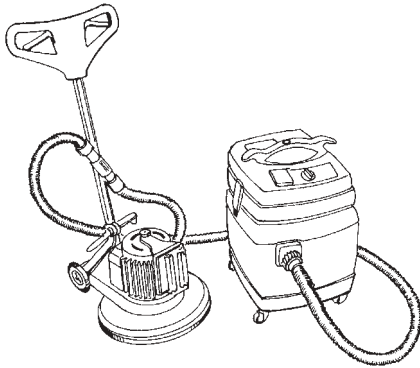

### KEY FEATURES

- Available in custom packages
- Quietest system available
- Efficient 3-stage filtering system
- Low profile rotary sander
- Bright, adjustable light
- Powerful totally enclosed polisher motor
- Non-marking wheels and castors
- Low profile buffer
- Tough crush-resistant hoses
- Super grip pad driver
- Heavy duty metal backed hard plate
- Rugged metal vacuum tools
- Unique skirting
- Tough roto-molded vac tank
- All steel polisher frame

### SPECIFICATIONS

#### Sander 1600dc

<b>Motor</b>	1.5 TEFC /120 VAC 60 Hz / 14 Amps
<b>Pad Driver (included)</b>	16 in. dia / 175 rpm
<b>Wheels (2)</b>	1 1/4 in. x 5 in. gray non-marking
<b>Power Cord</b>	50 ft. 12/3 gray non-marking
<b>Light</b>	1800 lumens, variable positioning
<b>Sanding Distance to Wall</b>	3/4 in.
<b>Warranty</b>	5 years
<b>Weight</b>	125 lb.
<b>Shipping Weight</b>	148

#### Clarke American Vac CAV-15

##### *Available in Standard or Deluxe Package*

<b>Vacuum Motor</b>	1.6 hp / 120 VAC 60 Hz / 8.3 Amps
<b>Air Flow (cfm) / Water Lift (in.)</b>	120 /90
<b>Tank</b>	15 gal. Polydur
<b>Casters</b>	(4) 3/4 in. x 2 in. gray non-marking
<b>Filter</b>	3 Stage
<b>Noise Level</b>	58 dB
<b>Auxiliary Power Outlet</b>	600 Watts
<b>Dimensions (in.)</b>	18 L x 17 W x 25 H
<b>Warranty</b>	2 years
<b>Weight of Machine (lbs.)</b>	33
<b>Shipping Weight</b>	50

### PACKAGE DESCRIPTIONS

- **Professional Dust Control Sanding System** (includes CAV-15 Sander Vacuum w/Deluxe tool package, Sander 1600dc w/adjustable light and pad driver, heavy duty cast aluminum hard plate, 28 in. long steel crevice tool, "Y" Connector and Adapter, and large hose with mesh storage bag)
- **CAV-15 Sander Vacuum w/Deluxe tool package** (includes tool pouch, 25 ft. hose, one-piece curved metal wand, heavy duty metal felt tool, heavy duty metal brush tool, round dusting tool, crevice tool)
- **CAV-15 Sander Vacuum w/std. tool package** (includes tool pouch, 13 ft. hose, 2-piece curved metal wand, felt tool, brush tool, round dusting tool, crevice tool)

#### Clarke®

2100 Hwy. 265  
Springdale, AR 72764

DISTRIBUTED BY:

Customer Service: 1.800.253.0367  
Fax Orders to: 1.800.825.2753  
Technical Service: 1.800.356.7274

©2002 ALTO U.S. Inc., All Rights Reserved. Specifications subject to change without notice. P/N 70638A