

Clarke®

Clarke®


Encore Rider Scrubbers



Encore Mini-Max

Three Machines in One

Clarke has streamlined the operation of the Encore Mini-Max Compact Rider Scrubber to combine the productivity of three machines into one. Models available: 26, 28, or 30-inch brush head.

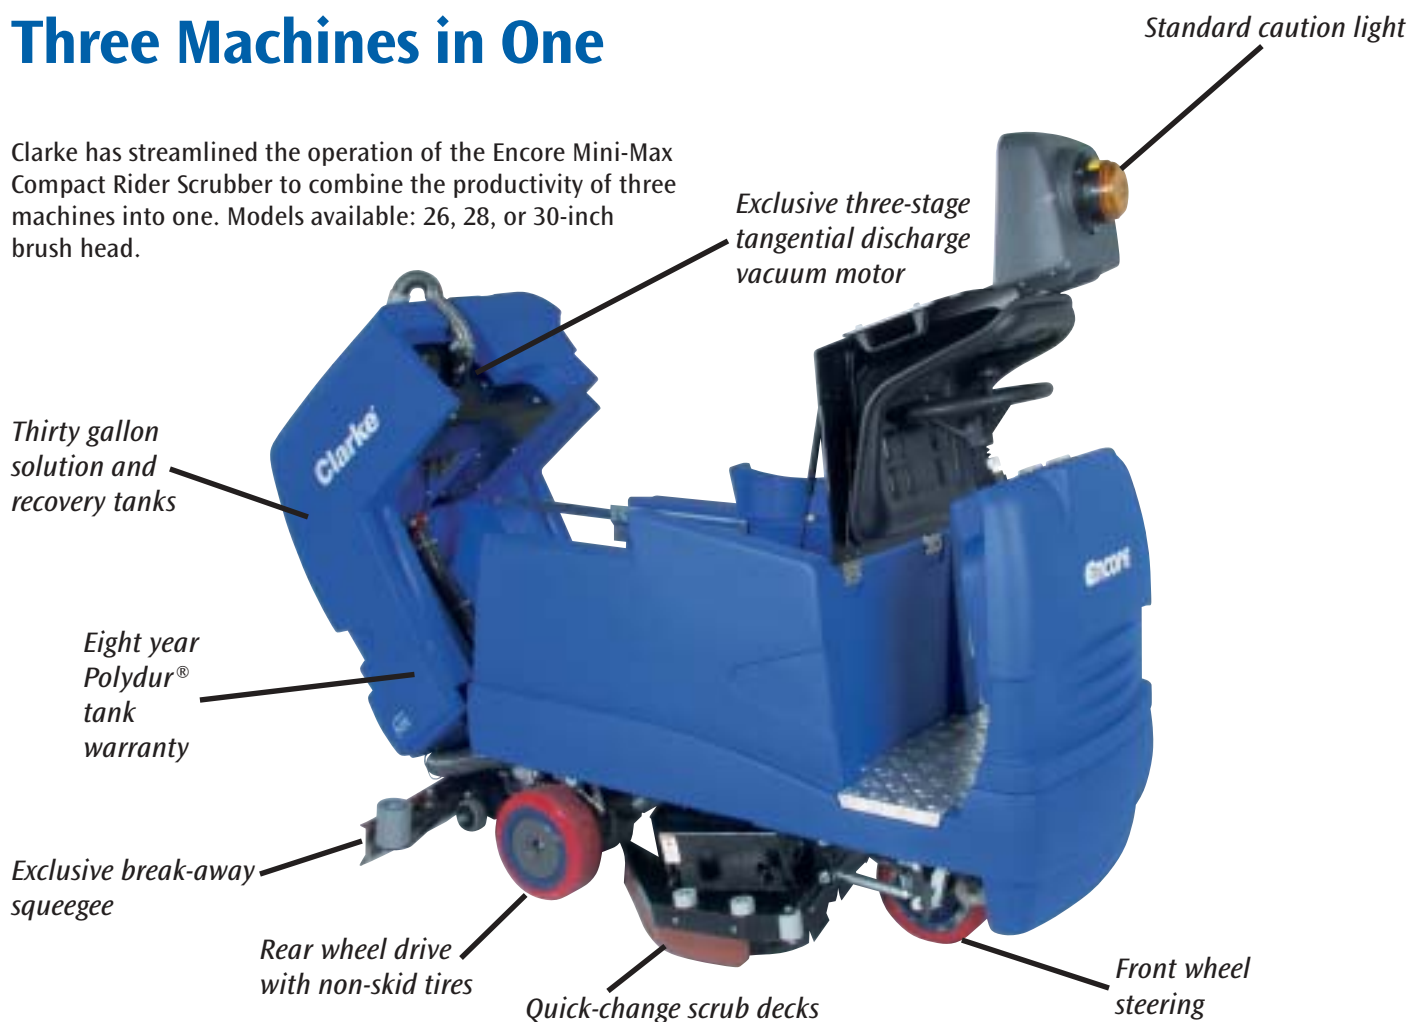

Controls

A control panel with the latest electronic technology minimizes the number of switches necessary to apply cleaning solution, scrub floors and recover all used solution and dirty water.



Performance

The Mini-Max provides high performance cleaning on many different surfaces. With three scrub decks to choose from...26 in. disc, 30 in. disc and 28 in. cylindrical.



Quick-Change Brush Heads...

...JUST ROLL THEM OUT

Encore Max Is Big On Performance



The control panel on the Encore Max puts all of the functions right at the operator's fingertips – within easy reach and easy to use.




Whether the floor surface is coated or uncoated concrete, ceramic tile or linoleum – the Encore Max is perfect for the job.



Flood control or off-aisle cleaning becomes an easy task with the spray and vac wand – a labor saving option on the Encore Mini-Max and Max.


ENCORE MINI-MAX

Rider Scrubber

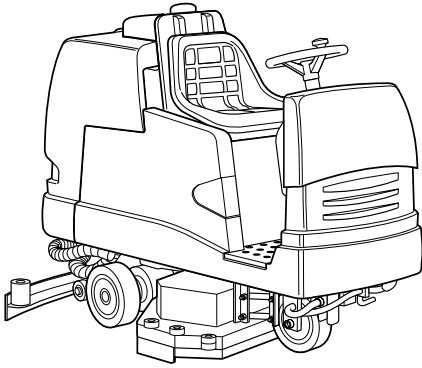

ENCORE MAX

Rider Scrubber

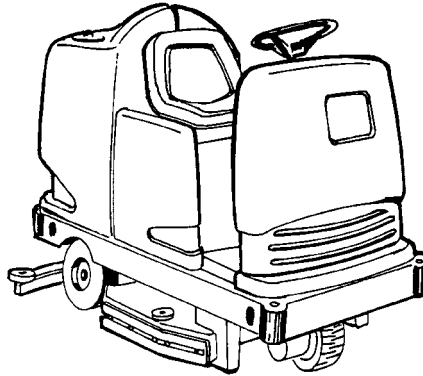

Clarke®

Division of
ALTO®

SPECIFICATIONS

	Encore Mini-Max 26 Rotary	Encore Mini-Max 28 Cylindrical	Encore Mini-Max 30 Rotary	Encore Max Rotary
Model				
Scrub Width	26 in.	28 in.	30 in.	34 in. or 38 in.
Squeegee Ass'y.	33 in.	40 in.	40 in.	40 in. or 44 in.
Batteries	6-250Ah	6-250Ah	6-250Ah	6-330Ah or 6-370Ah
Brush Motors	(1) 1.25 hp	(2) 1.0 hp	(1) 1.25 hp	(2) 1.7 hp
Brush Speed	200 rpm	850 rpm	200 rpm	300 rpm
Solution/recovery tank	30 gallons (113.6 l)	30 gallons (113.6 l)	30 gallons (113.6 l)	45 gallons (170 l)
Drive motor	.6 hp	.6 hp	.6 hp	1.5 hp
Vacuum motor	1 hp, 3 stage tangential discharge	1 hp, 3 stage tangential discharge	1 hp, 3 stage tangential discharge	.75 hp, 3 stage tangential discharge
Dimensions (L x W x H)	65 in. x 26 in. x 49 in.	65 in. x 26 in. x 49 in.	65 in. x 26 in. x 49 in.	34 in. (71.5 in. x 38 in. x 57 in.) 38 in. (71.5 in. x 41 in. x 57 in.)
Weight (lb.) w/batteries	770 (349.25 kg)	816 (370.12 kg)	793 (359.69 kg)	1800 (816.45 kg)
Noise (db)	70	70	70	72.2

WHO USES THIS MACHINE?

- Manufacturing plants
- Warehouses
- Schools and universities
- Super stores
- Hospitals
- Municipalities
- Federal government facilities
- Cleaning contractors

WHAT DOES IT DO BEST?

- Handles tough cleaning situations, especially double-scrubbing and ramp cleaning
- Provides high speed single-pass cleaning productivity

WHAT MAKES IT EASY TO USE?

- Operator-friendly controls and comfortable seat
- Smooth starting in both forward and reverse
- Maneuvers into confined areas
- Large clean-out doors and drains

WHAT ENHANCES ITS PRODUCTIVITY?

- 30,000-35,000 square feet per hour cleaning capability
- Rear wheel drive provides improved traction (Mini-Max model)
- Front wheel steering allows machine to turn in 72-inch aisles

WHAT ADDS TO ITS DURABILITY?

- Rugged construction
- Electronic controls and computer diagnostics for easy service and repair
- Corrosion proof Polydur® tanks
- Parabolic break-away squeegee

ACCESSORIES

- Off aisle spray & vac wand
- Wide variety of brushes



Clarke®

2100 Highway 265
Springdale, AR 72764

DISTRIBUTED BY:

Customer Service: 1.800.253.0367
Fax Orders to: 1.800.825.2753
Technical Service: 1.800.356.7274